


# BULBS — 6 VOLT, MOTOR CYCLE

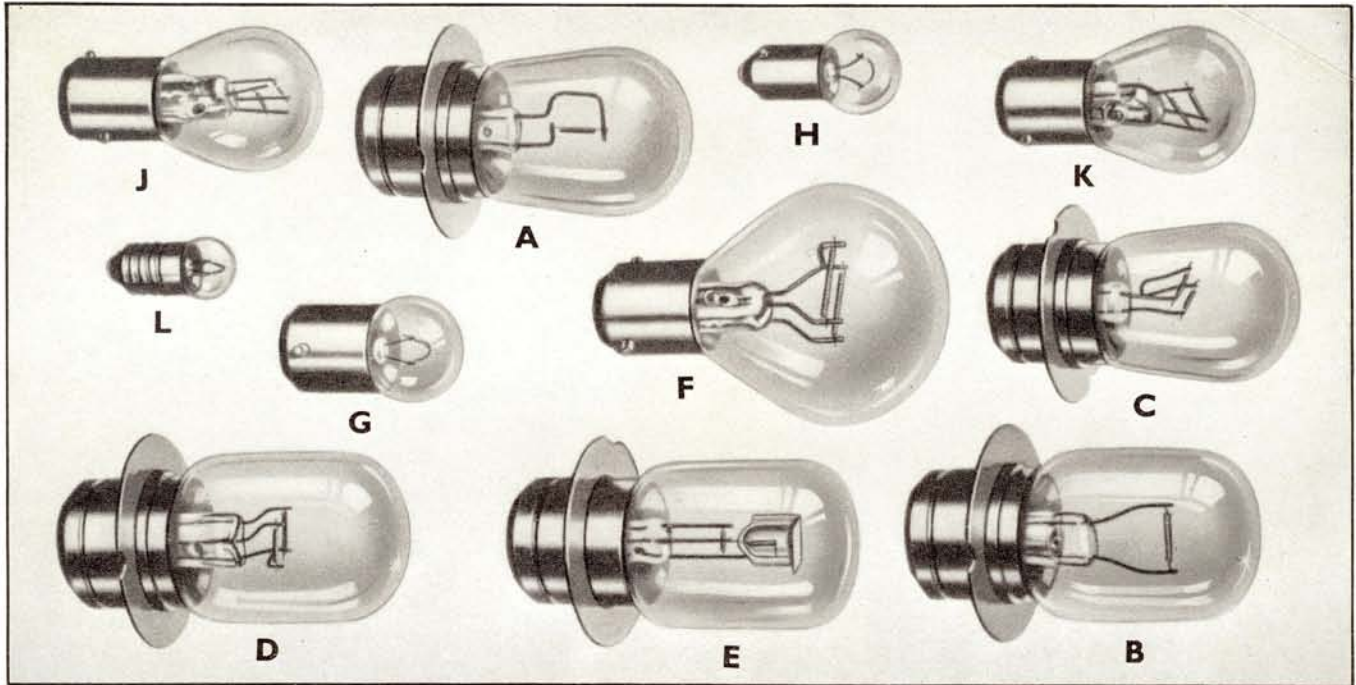

## HEADLAMP, FOGLAMP AND DRIVING LAMPS (PRE-FOCUS) — SINGLE FILAMENT

Bulb No.	Illustration Reference	Watts	BPF Contact	Filament	Replaces Bulb No.
172	A	36	Single	Axial .. .. .	160, 161, 163 and 164.
173	B	36	Single	Transverse .. .. .	193 and 318.
†659	A	36	Single	Axial .. .. .	—

## HEADLAMP (PRE-FOCUS) — DOUBLE FILAMENT

Bulb No.	Illustration Reference	Watts	BPF Contact	Filament	Replaces Bulb No.
311	C	18/18	Double	Transverse, vertical dip .. .. .	188
166	C	24/24	Double	Transverse, vertical dip .. .. .	—
377	E	25/25	Double	Duplo, hooded .. .. .	—
312	C	30/24	Double	Transverse, vertical dip .. .. .	174
373	D	30/24	Double	Transverse, left hand dip .. .. .	—
†602	C	30/24	Double	Transverse, vertical dip .. .. .	—
403	E	35/35	Double	Bow hooded, axial, duplo (Export Europe)	—

## HEADLAMP — DOUBLE FILAMENT

Bulb No.	Illustration Reference	Watts	Contact	Cap	Filament	Replaces Bulb No.
386	F	15/15	Double	SBC	Transverse ..	—
180	F	18/18	Double	SBC	Transverse ..	65
168	F	24/24	Double	SBC	Transverse ..	101, 102, 115 and 116S
169	F	30/30	Double	SBC	Transverse ..	61, 69 and 170

## SIDE, STOP TAIL AND NUMBER PLATE — PILOT AND WARNING LIGHTS

Bulb No.	Illustration Reference	Watts	Contact	Cap	Filament	Replaces Bulb No.
998	L	0.1 amp.	Single	MES	Coil .. ..	—
†974	L	15 amp.	Single	MES	Coil .. ..	—
990	L	3	Single	MES	Coil .. ..	—
200	G	3	Single	SCC	Coil .. ..	113
988	H	3	Single	MCC	Coil .. ..	—
205	G	6	Single	SCC	Coil .. ..	105
950	L	6	Single	MES	Coil .. ..	—
951	H	6	Single	MCC	Coil .. ..	—
352	J	3/18	Double	SBC	Transverse ..	—
384	J	6/18	Double	SBC, offset pin	Transverse ..	—
383	K	6/18	Double	SBC	Transverse ..	—
970	L	2.5 volt	Single	MES	Coil .. ..	—

† Cadmium Yellow    ‡ 3.5 volts only (Pilot Light for M35 Headlamp)    || For motor cycle rear lamps, up to and including 250 c.c.  
 MES .. Miniature Edison screw cap    MCC .. Miniature centre contact    SBC .. Small bayonet cap    SCC .. Single centre contact